

ARDEX AF 825

SURFACE TACKIFIER FOR CARPET TILES



ARDEX AF 825 is a water-based, extremely low-odour, solvent-free, acrylic, emulsion-based floorcovering tackifier. ARDEX AF 825 has a short airing time and permanent tack. It is protected from biodegradation and has good resistance to plasticiser migration.

Coverage - Flooring Type

- Carpet tiles
- Carpet tiles/Carpet underlay

Roller Type

- Foam up to 125m²
- Short pile up to 84m²

Location

- Replaceable internal application

Airing Time

- 10–60 minutes

Substrates

- Cementitious underlayment and concrete with moisture content that complies with NZS/AS 1884:2013
- Timber substrates that comply with NZS/AS 1884:2013
- Hardboard underlay board approved to AS 2458

Working Time

- Up to 24 hours

Open Time

- Up to 15 minutes

Floor Covering


- Carpet tiles with bitumen, felt, fleece, and PVC/PUR backings
- Carpet underlays

Packaging

10kg pail

Code

25014

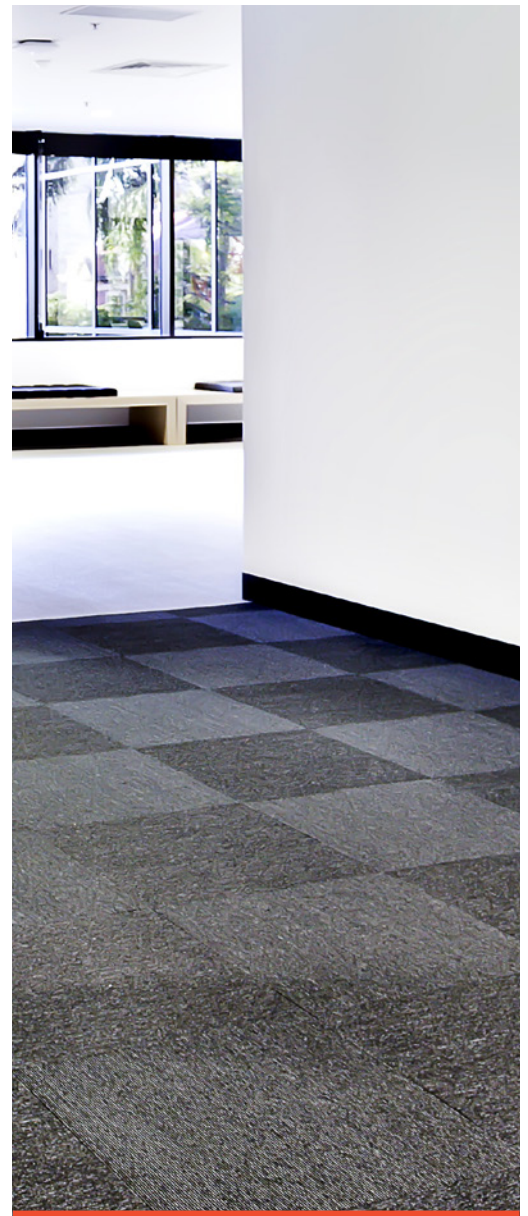

To find out more
call 0800 227 339 or
visit www.ardex.co.nz

Download the ARDEX app



search for:
'ARDEX New Zealand'

