



# Bona Pure Colour

## TWO COMPONENT, WATERBORNE FLOOR PAINT

Floor paint with excellent adhesion and hide



Hard-elastic PUR-based paint for renovation of resilient floor coverings in both commercial and residential applications. Excellent for both wood and resilient sports surfaces to mark zones and playfields. Bona Pure Colour has excellent adhesion properties, high strength and is heavily pigmented to achieve full hide in one to two coats (depending on colour). Available in ten popular standard colours and can also be ordered in the full spectrum of the RAL and NCS colour palette.

- Heavily pigmented for excellent hide
- Ultra-quick drying
- Available in 10 popular standard colours



# Bona Pure Colour

## TWO COMPONENT, WATERBORNE FLOOR PAINT

Floor paint with excellent adhesion and hide

### TECHNICAL DATA

<b>Product type:</b>	2-component waterborne polyurethane paint
<b>Sheen (at 60°):</b>	Matt: approx. 20% (on glass)
<b>Mixing ratio:</b>	1 part Bona R Hardener to 10 parts Bona Pure Colour (≈9,1 vol%)
<b>Pot life:</b>	max. 2 hours at 20°C (shorter if warmer)
<b>Dilution:</b>	Do not dilute, however 4% Bona Retarder can be added for extra open time.
<b>Drying time, until:</b>	- Next coat: 2-4 hours <sup>1</sup> - Full hardness: 3 days <sup>1</sup> <sup>1</sup> under normal room conditions, 20°C/60% R.H.
<b>Application tools:</b>	Bona SuperCoat Roller (11 mm pile)
<b>Application rate:</b>	8-12m <sup>2</sup> /litre (83-120 g/m <sup>2</sup> ) per coat
<b>Safety</b>	Paint: Unclassified Hardener: Classified. (see Safety Data Sheet).
<b>Cleaning:</b>	Wipe tools free from residual material before cleaning with a minimum of water. Dried material can be removed with acetone.
<b>Shelf life:</b>	2 years from date of production in unopened original container.
<b>Storage/transport:</b>	The temperature must not fall below +5°C or exceed +30°C during storage and transport.
<b>Disposal:</b>	Waste and emptied containers should be handled in accordance with local regulations.
<b>Pack size</b>	3 x 5 litres incl. hardener (0,45 lit)
<b>Certificates:</b>	EMICODE; EC1 <sup>PLUS</sup> – Very low indoor emissions <sup>2</sup> GREENGUARD Gold Certified EN 71-3: Application on children's toys

<sup>2</sup>Products with EC1<sup>PLUS</sup> classification are recognised by BREAA and LEED and can be used in green building projects.


Additional detailed information is noted in the appropriate Safety Data Sheet.



# Bona Pure Colour

TWO COMPONENT, WATERBORNE FLOOR PAINT

Floor paint with excellent adhesion and hide

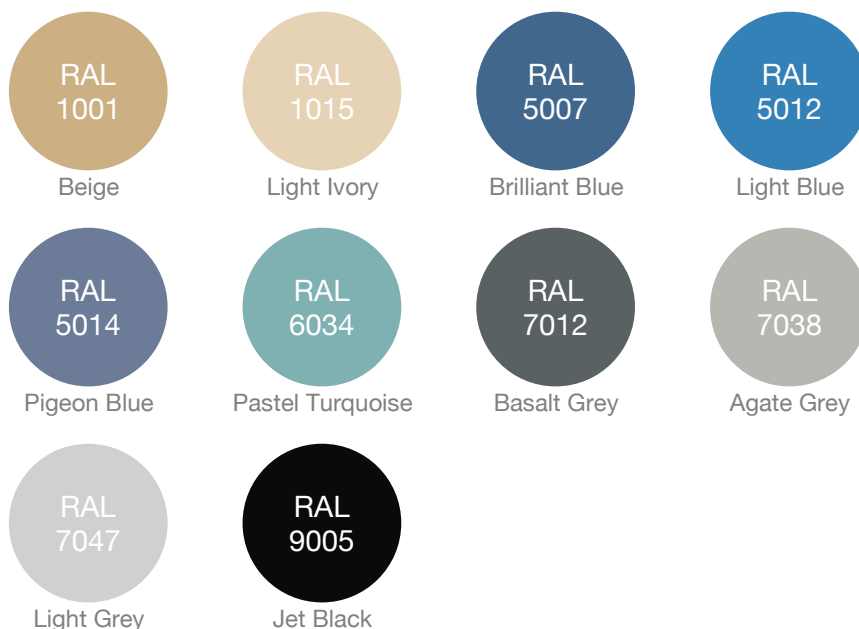

**Note:** The colour samples shown above are indicative only and may vary depending on monitor and printer settings. Contact your local Bona representative for a paper sample. Custom colours according to the RAL and NCS colour system are available to special order.

## PREPARATION

Care must be taken to ensure that the flooring is completely free of any contamination that will impair the adhesion of Bona Pure Colour. Removal of any prior polish, care treatment or other contamination is a vital step in ensuring the successful application of Bona Pure Colour. Bona has developed several possible solutions depending on the flooring type and equipment available. Please consult the guide "Best practices for Floor Renewal" which is available under "Documents" on the Bona Pure Colour product page at [bona.com](http://bona.com) for a full description of all recommended solutions

Always test and evaluate the adhesion to ensure compatibility to the surface before treating the whole floor.

**WARNING:** Linoleum & other porous floorings readily absorb water. If a chemical or wet removal of old polish or other care product is made, the floor must be allowed a minimum of 24 hours drying time in good conditions. To support the drying process, ventilators and heaters can be used. Observe that any residual water and cleaning chemicals in the flooring may cause adhesion failure!

Optimal processing conditions are between 18-22°C and 40-60% relative humidity. High temperatures and low humidity reduce the drying time, while low temperatures and high humidity increase the drying time.

2023-06-19

This data sheet replaces all previous versions.  
Please check [bona.com](http://bona.com) to ensure that you have the latest version.



# Bona Pure Colour

## TWO COMPONENT, WATERBORNE FLOOR PAINT

**Floor paint with excellent adhesion and hide**

### TREATMENT SCHEDULE

Standard renovation of resilient flooring

#### Renovation of Rubber/PVC

- 1-2x Bona Pure Colour
- 1-2x Bona Pure/Bona Pure HD

#### Renovation of Linoleum

- 1x Bona LinoPrime
- 1-2x Bona Pure Colour
- 1-2x Bona Pure/Bona Pure HD

Wood sport surfaces

#### Untreated wood:

- 1x Bona SuperSport Primer
- 1x Bona SuperSport ONE/Bona SuperSport HD
- Light sanding 150 grit abrasives
- 1-2x Bona Pure Colour (for zones, areas)
- 1x Bona SuperSport Line Paint
- 1-2x Bona SuperSport ONE/Bona SuperSport HD

#### Pre-finished wood surfaces:

- Cleaning and superficial sanding
- 1-2x Bona Pure Colour (for zones, areas)
- 1x Bona SuperSport Line Paint
- 1-2x Bona SuperSport HD

Resilient sport surfaces

#### Rubber and PVC

- Cleaning and sanding
- 1-2x Bona Pure Colour (for zones, areas)
- 1x Bona SuperSport Line Paint
- 1-2x Bona SuperSport Pure HD

#### Linoleum

- Cleaning and sanding
- 1x Bona LinoPrime
- 1-2x Bona Pure Colour (for zones, areas)
- 1x Bona SuperSport Line Paint
- 1-2x Bona SuperSport Pure HD

### APPLICATION

- 1) Check the colour code and the batch number on the paint container. Only use paint from the same batch number on the same floor. Alternatively, the entire amount of paint that is to be used can be carefully mixed together in a separate container to ensure colour consistency.
- 2) Mix the paint thoroughly and pour the required amount through the supplied filter into a separate container such as a Bona Mixing bucket.
- 3) While machine stirring, slowly add 9% Bona R Hardener (one full bottle per bucket) into the mixing bucket. Stir thoroughly for at least 1 minute.
- 4) Allow the mixture to react for at least 5 minutes prior to application and use the mixture within the recommended pot life of 2 hours.
- 5) Apply the mixed paint using a Bona SuperCoat Roller (11 mm pile) at approx. 8-12 m<sup>2</sup>/lit. Roll crosswise with a smooth flowing motion avoiding accumulations of product.

2023-06-19

This data sheet replaces all previous versions.  
Please check [bona.com](https://bona.com) to ensure that you have the latest version.



# Bona Pure Colour

## TWO COMPONENT, WATERBORNE FLOOR PAINT

### Floor paint with excellent adhesion and hide

- 6) Additional applications of Bona Pure Colour should be carried out between 2 and maximum 12 hours after the application of the earlier coat. If the previous layer of Bona Pure Colour has been allowed more than 12 hours drying time, then a light intermediate sanding with a Bona Scrad Pad must be made to ensure adhesion. After sanding, clean the surface thoroughly before applying the next layer.
- 7) Complete the treatment with one to two layers of the appropriate Bona Lacquer.

**Note:** Bona Pure Colour should never be used as the final wear surface.

The curing process takes approximately 3 days, (90% cured in 24 hours, 100% after 72 hours) in good conditions.

To support and to speed up the drying process, suitable ventilators are recommended.

If Bona R Creative Chips are to be used, they should be distributed evenly on the final layer of Bona Pure Colour immediately after its application. Intermediate sanding to help level the chips should only take place after the application of the first layer of lacquer is suitably dried. A subsequent layer of lacquer should then be applied within 24 hours.

### IMPORTANT!

- 1) Plasticisers found in materials such as carpet underlays, furniture legs, castors and adhesives used for fixing can lead to softening and discolouration. Exposure to hair dyes or rubber tyres on cars, cycles and baby strollers can lead to permanent, irreversible discolouration of the surface. Use protection or completely avoid contact.
- 2) Although Bona lacquers (which should overcoat Bona Pure Colour) have an excellent resistance to most chemicals including aggressive cleaners and disinfectants; unattended spills of wine, coffee, tea and similar beverages can cause a persistent, cosmetic stain in the surface. Where increased risk of this type of spillage exists, it is advised to only use Bona Pure Colour with colours on the dark side of the colour spectrum and avoid light coloured backgrounds completely, as well as taking measures to ensure that spills are removed promptly.
- 3) Due to the specific make up of PU flooring there is a risk of migration of components in the flooring that may cause discolouration. For this reason, we do not recommend the use of Bona Pure Colour on PU flooring.

The information in this document and all other advice and recommendations that we provide to help and assist the applicator are based on previous experience and extensive testing but makes no claim to be complete. Because of the wide range of possible uses and conditions of application of our products, we do not relieve users from the need to carry out their own trials or to seek technical advice from Bona before use. Bona can only guarantee its products and not the construction as a whole. Observe recommendations from flooring manufacturer and the provisions of relevant standards.