

DriFast® Stain

Technical data sheet

A premium quality quick-drying stain for interior hardwood floors, DriFast® Stain's advanced technology formula provides speed and high performance for hardwood floor finishing professionals. Compatible with all Bona® waterborne systems and all other Bona® finish systems.

- 2 hour dry time*
 - No bleed back
 - Penetrates, stains, and seals bare wood
 - 800-1,000 sq ft/gal coverage rate
 - Available in 25 wood tones and white
 - All stain colors can be blended, offering an endless color palette
 - Clean up with mineral spirits
 - Easy touch-ups (mineral spirits for thinning dark or heavy spots)
- *6 hours minimum for white and 12-18 hours for Ebony, Spice Brown, Bark and Cocoa under ideal conditions of 60°-80° F(16°-27°C) with 35-75% relative humidity.

Technical data

Physical Characteristics:

Ingredients – Wood tones: Oil-modified resins, mineral spirits (solvent), pigments, driers

White: Oil-modified resins, mineral spirits (solvent), titanium dioxide, fillers

Colors – Wood tones: Natural, Golden Oak, Nutmeg, Early American, Provincial, Special Walnut, Rosewood, Red Mahogany, Jacobean, Graphite, Medium Brown, Antique Brown, Puritan Pine, Cherry, Sedona Red, Spice Brown, Grey, Ebony, Bark, Cocoa, Driftwood, Birch, Aged Pewter, Twig and Sand Dune.

Paste: White (Not recommended on white oak due to excessive color variation).

Solids – 35-47%

Density – Wood tones: 7.2-7.5 lbs/gallon (0.86-0.90 s.g.), White: 8.7-9.0 lbs/gallon (1.04-1.8 s.g.)

US Regulatory VOC – 550 g/L

Odor – Mild solvent odor

Stability – One year shelf life in unopened container

Flashpoint – 116.6°F (47°C)

Packaging – 1-quart cans, 1-gallon cans

Application Characteristics:

Clarity – Semi-transparent (dry)

Drying Time – 2 hours for wood tones, 6 hours minimum for white and 12-18 hours for Ebony, Spice Brown, Bark and Cocoa under ideal conditions of 60°-80° F(16°-27°C) with 35-75% relative humidity.

Coverage – 800-1,000 square feet per gallon

Application Tools – Clean cloths, brush, cut-in pad

Recommended Use

- Apply only over bare wood
- Prepares the surface for a topcoat of Bona® waterborne or any other Bona® finish

Directions

BEFORE USING, READ ALL DIRECTIONS AND SAFETY DATA SHEETS.

FOR TECHNICAL ADVICE: Call Bona US at 800-872-5515

COMPATIBILITY: Bona does not recommend using white stain on white oak due to excessive color variation. Stain, sealer and finish results may vary widely depending on the wood species, especially on oily and resinous Exotics. ALWAYS PREPARE A SAMPLE OR TEST AREA TO DETERMINE COMPATIBILITY, APPEARANCE AND DESIRED RESULTS.

SANDING AND PREPARATION OF NEW FLOORS: 1. Sand and prepare floor using accepted industry association methods. 2. Make your final cut with 80-100 grit paper and MultiDisc with to 80-120 grit. 3. Use a Tampico Brush on a buffer and vacuum thoroughly. 4. Tack with a dry Bona® Microfiber Mop or cloth to remove dust. 5. Apply stain system.

THE BONA® DRIFAST® STAIN SYSTEM: Bona DriFast Stain is a redissolving stain designed to penetrate, stain and seal bare wood. Bona DriFast Stain is designed to work with all Bona finishes. Colors may be blended with all other Bona DriFast Stains. Visit www.bona.com for additional product information.

RECOMMENDED APPLICATORS & TOOLS: Brush, cut-in pad, cloth, carpet disc

Finishing 



DriFast® Stain

Technical data sheet

Finishing

MIXING INSTRUCTIONS: Shake or stir well before using. Do not thin.

STAINING: 1. After preparing surface, apply Bona DriFast Stain with brush, cut-in pad, cloth or carpet disc driven by a buffer in the direction of the grain at the coverage rate of 800 – 1000 square feet per gallon. 2. Allow 1-3 minutes for penetration. Remove excess by hand wiping or buffing with an absorbent, non-abrasive material. 3. Allow stain to dry thoroughly (minimum 2 hours for wood tones, 6 hours minimum for white and 12-18 hours for Ebony, Spice Brown, Bark and Cocoa under ideal conditions of 60°-80° F(16°-27°C) with 35-75% relative humidity. High humidity and/or low temperature conditions will extend dry time, while increased ventilation and airflow will reduce dry time. Apply sealer or finish after the recommended dry time, but within 48 hours after application. 4. Apply any Bona finish system over thoroughly dried stain.

DANGER: RAGS, STEEL WOOL OR WASTE SOAKED WITH BONA DRIFAST STAIN MAY SPONTANEOUSLY CATCH FIRE IF IMPROPERLY DISCARDED. IMMEDIATELY AFTER EACH USE, PLACE RAGS, STEEL WOOL OR WASTE IN A SEALED, WATER-FILLED, METAL CONTAINER.

Maintenance

CLEAN-UP: Clean application tools and equipment with mineral spirits.

STORAGE AND DISPOSAL: Store at room temperature. Keep container closed when not in use. Do not store above 100°F (38°C). Do not transfer contents to other containers for storage and disposal. In case of spillage, absorb with inert material. Dispose of contaminated absorbent, container and unused contents in accordance with local, state and federal regulations.


Order Information

| Item # | Size / Color | #/Case |
|-------------|------------------------------------|--------|
| SS750051100 | Quart – Natural | 6 |
| SS750051101 | Quart – Nutmeg | 6 |
| SS750051102 | Quart – Golden Oak | 6 |
| SS750051103 | Quart – Early American | 6 |
| SS750051104 | Quart – Provincial | 6 |
| SS750051105 | Quart – Special Walnut | 6 |
| SS750051106 | Quart – Rosewood | 6 |
| SS750051107 | Quart – Red Mahogany | 6 |
| SS750051108 | Quart – Jacobean | 6 |
| SS750051109 | Quart – Graphite (formerly Ebony) | 6 |
| SS750051110 | Quart – White | 6 |
| SS750051111 | Quart – Medium Brown | 6 |
| SS750051112 | Quart – Antique Brown | 6 |
| SS750051113 | Quart – Puritan Pine | 6 |
| SS750051114 | Quart – Cherry | 6 |
| SS750051174 | Quart – Spice Brown | 6 |
| SS750051175 | Quart – Sedona Red | 6 |
| SS750051176 | Quart – Grey | 6 |
| SS750051177 | Quart – Ebony | 6 |
| SS750051178 | Quart – Bark | 6 |
| SS750051179 | Quart – Cocoa | 6 |
| SS750051180 | Quart – Driftwood | 6 |
| SS750051181 | Quart – Birch | 6 |
| SS750051182 | Quart – Aged Pewter | 6 |
| SS750051183 | Quart – Twig | 6 |
| SS750051184 | Quart – Sand Dune | 6 |
| SS750018100 | Gallon – Natural | 4 |
| SS750018101 | Gallon – Nutmeg | 4 |
| SS750018102 | Gallon – Golden Oak | 4 |
| SS750018103 | Gallon – Early American | 4 |
| SS750018104 | Gallon – Provincial | 4 |
| SS750018105 | Gallon – Special Walnut | 4 |
| SS750018106 | Gallon – Rosewood | 4 |
| SS750018107 | Gallon – Red Mahogany | 4 |
| SS750018108 | Gallon – Jacobean | 4 |
| SS750018109 | Gallon – Graphite (formerly Ebony) | 4 |
| SS750018110 | Gallon – White | 4 |
| SS750018111 | Gallon – Medium Brown | 4 |
| SS750018112 | Gallon – Antique Brown | 4 |
| SS750018113 | Gallon – Puritan Pine | 4 |
| SS750018114 | Gallon – Cherry | 4 |
| SS750018160 | Gallon – Ebony | 4 |
| SS750018161 | Gallon – Grey | 4 |

DriFast® Stain

Technical data sheet

| | | |
|-------------|----------------------|---|
| SS750018166 | Gallon – Spice Brown | 4 |
| SS750018165 | Gallon – Sedona Red | 4 |
| SS750018167 | Gallon – Bark | 4 |
| SS750018168 | Gallon – Cocoa | 4 |
| SS750018169 | Gallon – Driftwood | 4 |
| SS750018170 | Gallon – Birch | 4 |
| SS750018171 | Gallon – Aged Pewter | 4 |
| SS750018172 | Gallon – Twig | 4 |
| SS750018173 | Gallon – Sand Dune | 4 |

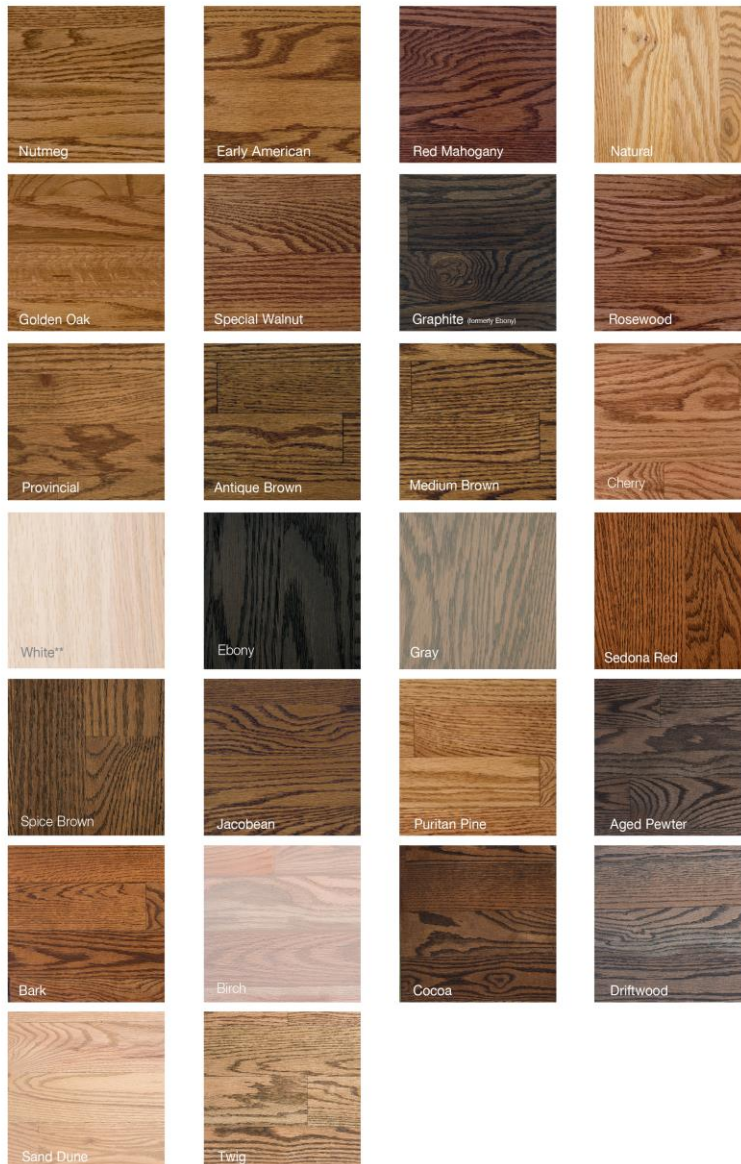

Finishing