

ARDEX AF 2525

TWO-COMPONENT HEAVY DUTY ADHESIVE



ARDEX AF 2525 is a low odour, low emission, solvent free two component polyurethane floorcovering adhesive. ARDEX AF 2525 is ideal for installing all types of vinyl, rubber, exterior floorcoverings such as artificial grass, dense non-absorbent backed floorcoverings and some timber floorcoverings.

Coverage - Flooring Type

- Homogenous and Heterogeneous PVC Sheet Floorcoverings, Rubber flooring, VCT flooring
- Linoleum and other backings with little structure
- Heavily structured backings
- Timber

Trowel Size

- A2 up to 20m²
- B1 up to 13m²
- B2 up to 12m²
- B10 up to 6m² (contact floorcovering manufacturer for recommended trowel sizing)

Location

- Permanent internal and external applications

Airing Time

- 0-5 minutes

Substrates

- Carpet pad underlay, ementitious underlayment and concrete with moisture content that complies with NZS/AS 1884:2013
- Hardboard underlay board approved to AS 2458

Working Time

- Up to 70 minutes

Open Time

- Up to 75 minutes

Floor Covering


- All types of vinyl floorcoverings
- All types of rubber floorcoverings
- All types of exterior floorcoverings
- Some types of timber floorcoverings

Packaging

6kg pail

Code

25018

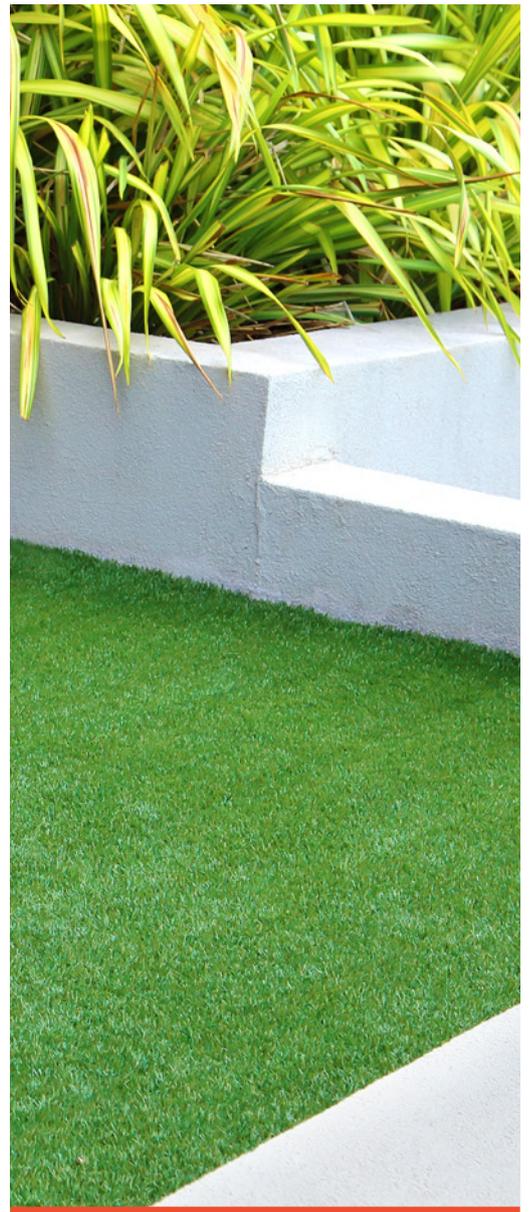

To find out more
call 0800 227 339 or
visit www.ardex.co.nz

Download the ARDEX app



search for:
'ARDEX New Zealand'

